

SOLIDS HANDLING PUMPS

Model: ANCV2000



PHYSICAL DATA:

DISCHARGE SIZE	4"
IMPELLER TYPE	9-Vane, vortex - Ductile Iron
CABLE LENGTH	35'

LIQUID HANDLING:

SOLIDS HANDLING	3"
MAXIMUM LIQUID TEMP.	140°F – Intermittent 113°F – Continuous
ACCEPTABLE PH RANGE	6-8

TEMPERATURE:

WINDING INSULATION	180°C
INSULATION CLASS	H

TECHNICAL DATA:


POWER CORD TYPE	SOW
SENSOR CORD TYPE	SOW
MOTOR HOUSING	Class 35 Cast Iron
CASING	Class 35 Cast Iron
IMPELLER	Ductile Iron
MOTOR SHAFT	SUS416
HARDWARE	SS
"O" RINGS	Viton™
MECHANICAL SEALS	SiC Dual Mechanical
UPPER BEARING	6305 Radial
LOWER BEARING	5309 Angular Contact

ELECTRICAL DATA:


R.P.M.	1750
MOTOR TYPE	Induction (3PH)
GENERAL INSULATION CLASS	H
STATOR WINDING CLASS	H
WINDING INSULATION TEMP	180°C
VOLTAGE TOLERANCE	+10%
HP	20
VOLTAGE	230/460
PHASE	3
SERVICE FACTOR	1.42

MODEL	HP	HZ	VOLTS/PH	RPM	FULL LOAD AMPS	NEMA START CODE	CORD TYPE	CORD SIZE	CORD O.D.
ANCV2000M3-35	20	60	230/3	1750	52	G	SOW	4AWG/4C	1.45
ANCV2000M4-35	20	60	460/3	1750	26	G	SOW	4AWG/4C	1.45


FEATURES

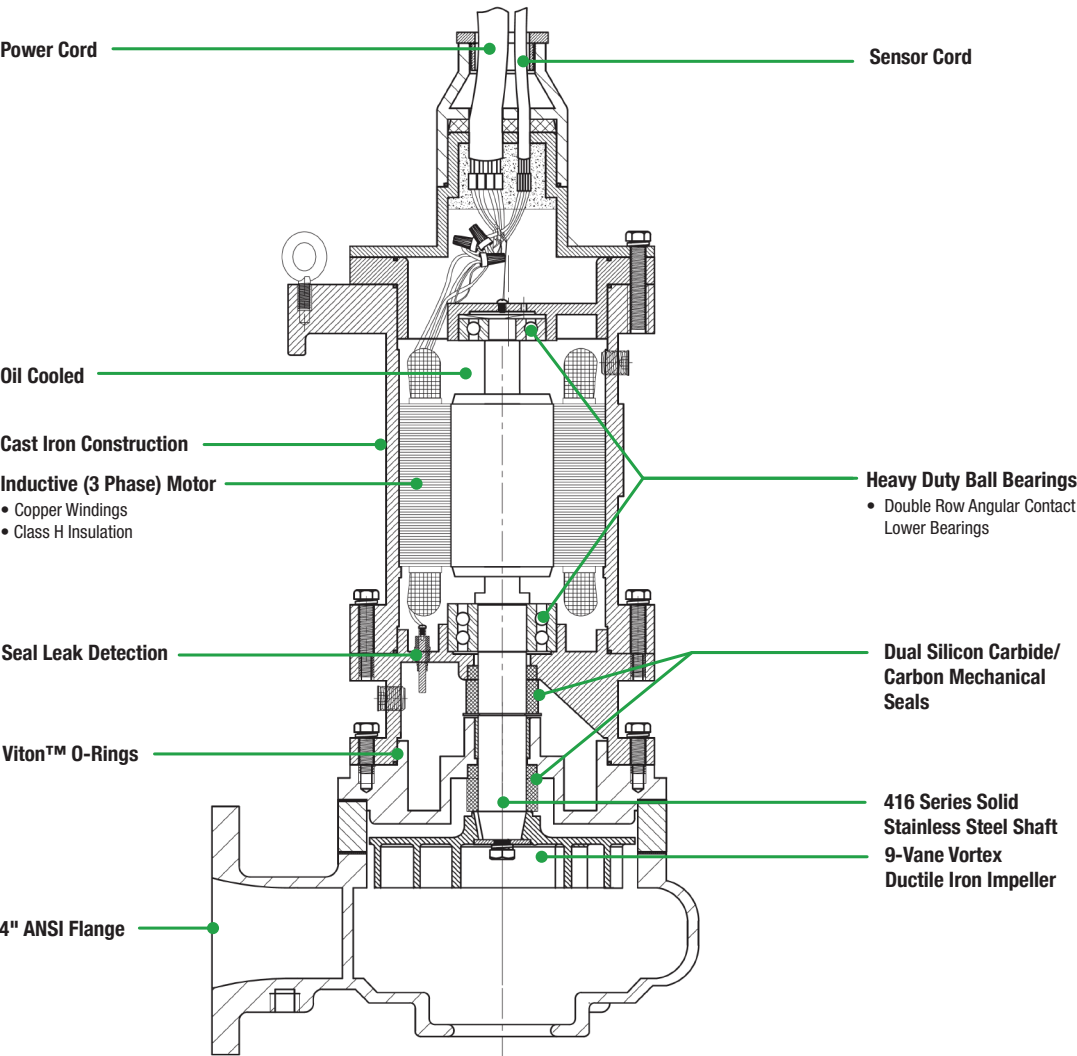

DIMENSIONS

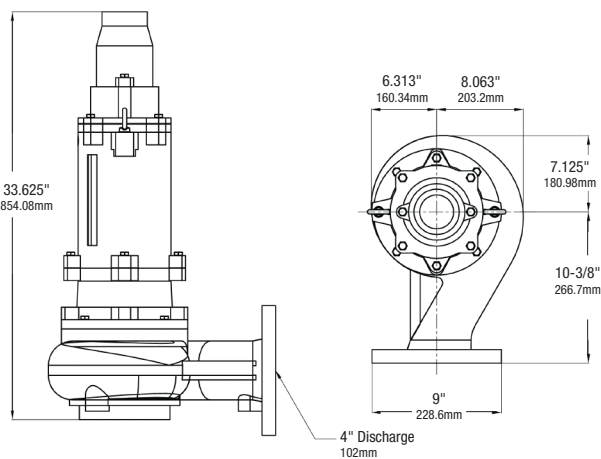

PERFORMANCE CURVE

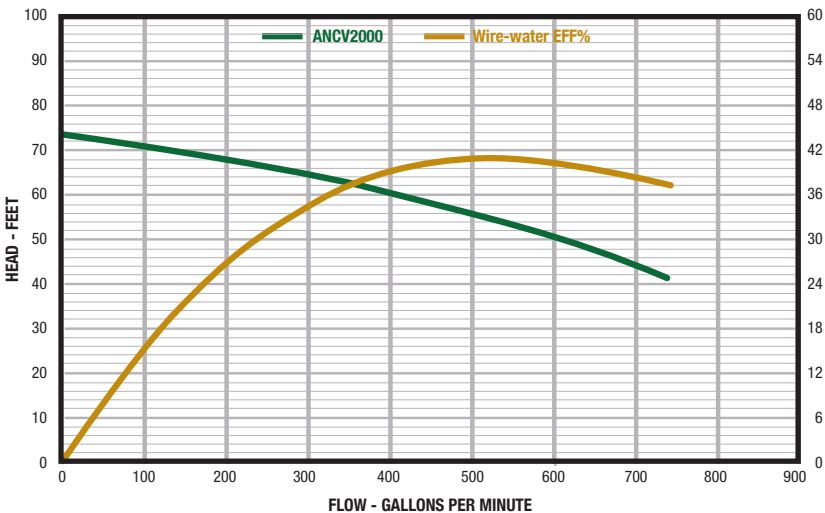

P U M P

Honest, Professional, Dependable

1191 Commerce Parkway, Ashland, Ohio 44805
Telephone: 855 281-6830 • Fax: 877 326-1994 • ashlandpump.com