



P U M P

POOL PUMPS

Engineered for the Pool Professional



P U M P


1191 Commerce Parkway, Ashland, Ohio 44805 • Telephone: 855 281-6830 • Fax: 877 326-1994 • ashlandpump.com

AP-0630 C26

Pool Cover Pump

PCP25S-25 Automatic Pool Cover Pump

- Pool cover drawdown to 1/4"
- Activates at 1"
- Water-activated induction switch activates sooner and draws down lower than traditional float switches
- Patent pending airlock clear button - no more wasted service calls for air-locked pump
- LED lighted power cord plug makes it easy to check if the unit is receiving power
- 25' power cord
- 3-Year warranty



Patent pending
airlock clear
button



LED lighted
power cord plug


Main Drain Pump

SSMD100 1 HP All-Stainless Main Drain Pump

- 6120 GPH

SSMD75 3/4 HP All-Stainless Main Drain Pump

- 5580 GPH
- Fits vinyl liner and Gunite main drains
- Stainless steel impeller
- 1-1/2" discharge
- Steel handle
- 25' power cord
- 1-Year warranty

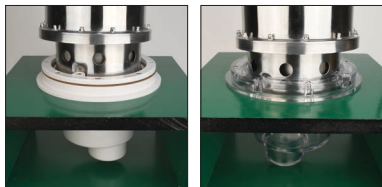

Fits both vinyl liner and Gunite drains



1-1/2"
discharge

Stainless Utility Pump

SSU100 1 HP All-Stainless Steel Utility Pump

- 5580 GPH

SSU50 1/2 HP All-Stainless Steel Utility Pump

- 4440 GPH
- Pumps down to 1/8"
- 1-1/2" discharge
- 25' power cord
- 1-Year warranty



1-1/2"
discharge

Utility Pumps

UT80, UT56 Submersible Utility Pump

- UT80: 1/2 HP, 3120 GPH
UT56: 1/3 HP, 2880 GPH
- Corrosion-resistant thermoplastic construction
- Efficient PSC motor
- Handles 1/8" solids
- 8' power cord



UT33A Submersible Auto Utility Pump

- 1/3 HP, 2520 GPH
- Automatic on/off operation with water sensing technology for built-in motor protection
- Energy efficient PSC motor (3.5 Amps)
- Designed to fit inside 8" pipe
- Removes water down to 1/8"
- 3/4" or 1-1/4" NPT discharge
- 25' power cord



UT16 Submersible Utility Pump

- 1/6 HP, 1680 GPH
- 20' maximum vertical lift
- Energy efficient PSC motor (2.9 Amps)
- Handles 1/8" solids
- 1" NPT discharge
- 25' power cord



Effluent Pump

EP40 4/10 HP Cast Iron Effluent Pump

- 4800 GPH
- Heavy-duty cast iron construction
- Oil-filled continuous duty PSC motor
- Cast iron impeller
- 3/4" solids handling
- Wide angle float switch



Sump Pumps

PS50W, PS33W Thermoplastic Sump Pump

- PS50W: 1/2 HP, 4080 GPH
PS33W: 1/3HP, 3480 GPH
- Thermoplastic corrosion-resistant housing
- Continuous-duty PSC motor with aluminum housing for heat dissipation
- Thermoplastic vortex impeller passes 3/8" solids
- Wide angle float switch



PS50V, PS33V Thermoplastic Sump Pump

- PS50V: 1/2 HP, 4080 GPH
PS33V: 1/3HP, 3480 GPH
- Thermoplastic corrosion-resistant housing
- Continuous-duty PSC motor with aluminum housing for heat dissipation
- Thermoplastic vortex impeller passes 3/8" solids
- Vertical float switch



B33W1-20 1/3 HP Cast Iron Sump Pump

- 3120 GPH
- Cast iron housing, thermoplastic corrosion-resistant base
- Oil-filled continuous-duty PSC motor
- Tethered float
- 20' power cord



Accessories

060M3A002 Wide Angle Float Switch

- Piggyback plug
- 25' power cord

